

TWINFRESH
STYLE WiFi



Power from

2 W

Air flow up to

50 m³/h

Sound pressure level from

1 dBA*

*At 3 m distance.



Style WiFi is an up-to-date and efficient solution to create a comfortable indoor climate and air exchange in refurbished premises, recently settled houses or renovated flats.

TWINFRESH



**MODERN
AND SILENT**

FUNCTIONAL

Many units can be connected to one control network.

EFFICIENT

High heat recovery efficiency of up to 90 % is achieved due to the use of a cellular regenerator.

USER-FRIENDLY

The design of the unit provides easy maintenance and installation.



Noise-insulating material provides noise absorption during the operation of the ventilator.



It is enough to have only one ventilator operating in regeneration or ventilation mode to provide ventilation in the room.








The unit can be controlled via remote control and buttons on the control panel. Flexible customisation for each user via an app on the smartphone.

The unit modes are controlled via the sensor control panel located on the casing of the unit, via the remote control or the smartphone.






Operation modes:

- Speed setup 
- Operation mode setup
 - Ventilation 
 - Regeneration 
- Timer setup
 - 4 hours at speed III 
 - 8 hours at speed I 



The control buttons are also duplicated on the ventilator casing:

- ventilation with energy recovery 
- ventilation 
- speed switching and ventilator turning off 

It is possible to control all the ventilators simultaneously by connecting them to a single Wi-Fi network. In this case, all ventilators (Slaves) will respond to a signal from the Master ventilator only. TwinFresh Style WiFi units can be combined into one control circuit.



EASY CONTROL

ADVANTAGES



Trendy ventilator design.



High efficiency – 90%.



Can be mounted inside a prepared hole (from Ø170 mm) in a wall.



A humidity sensor.



Connection of the units into one control network via WiFi.



Connection of an external CO₂ sensor or other external relay sensors.



Automatic drafts shutoff when the ventilator is off due to the air damper.



Sound pressure level from 1 to 26 dBA at a distance of 3 m.



Ventilation of premises with the area of about 25 m² (the area is approximate and depends on the ventilation standards in your country).



Simple mounting and maintenance.



It is advisable to use paired units to ensure balanced ventilation.

Application example



Installation into a wall with a standard thickness using the EH-14 outer hood



Angular mounting with the NP 160 white mounting kit



Mounting into a thin wall using the EH-2 outer hood

RETAINS HEAT

To preserve indoor heat, the ventilator operates in regeneration mode with two cycles, so that heat is returned to the room, the humidity balance is maintained, and the load on the heating system in winter is reduced.



WHEN IT IS COLD OUTSIDE

CYCLE I

Stale air extraction.

Warm stale extract air is extracted from the room, simultaneously heating up and moisturising the regenerator. The filter prevents air contaminants from entering the regenerator.

In 70 seconds the ventilator switches to the supply mode automatically.

Cold air enters a premise, and in 70 seconds the ventilator switches to the air exhaust mode.

Fresh but cold and dry intake air from outside flows through the regenerator, absorbs accumulated moisture and is heated due to the accumulated heat. The filter cleans the air of dust and insects.

CYCLE II

Clean air supply

COLD AIR

WARM AIR

WARM AIR


COLD AIR

SAVES ENERGY


To ensure energy efficiency, the ventilator operates in energy recovery mode with two cycles, thereby reducing the load on the air conditioning system in summer.

WHEN IT IS HOT OUTSIDE



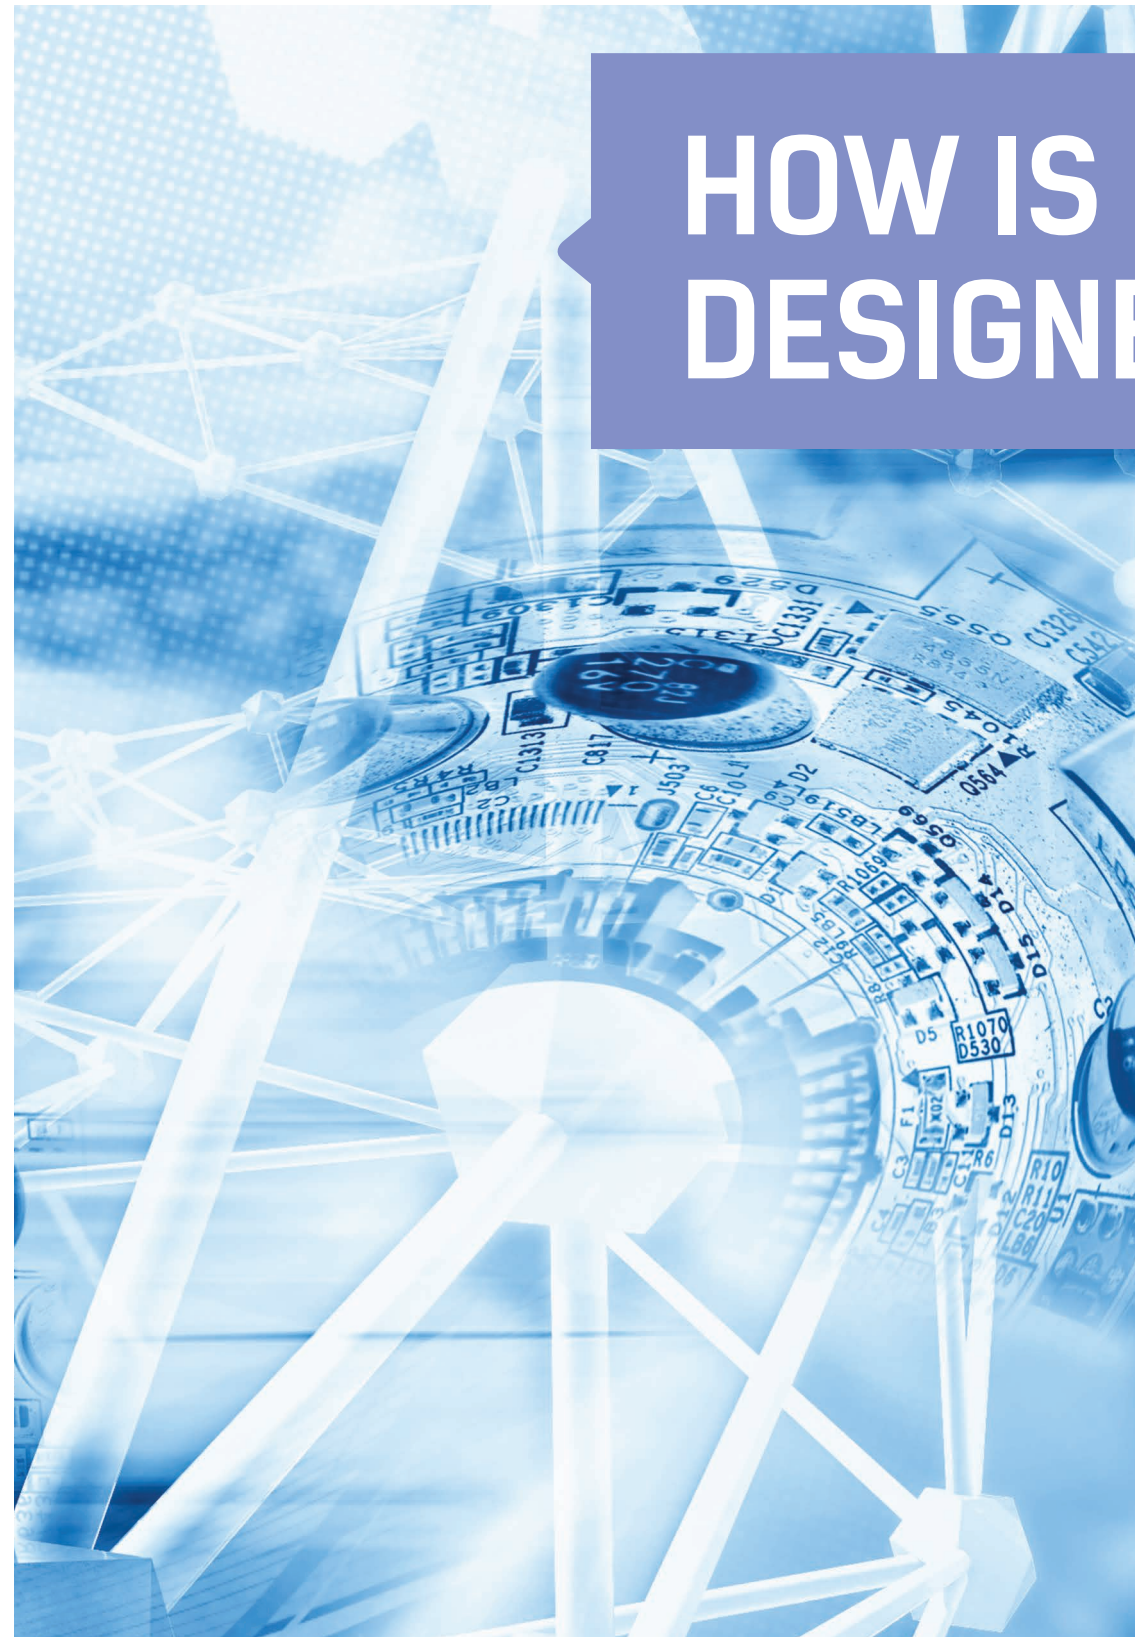

**HOW IS IT
DESIGNED?**

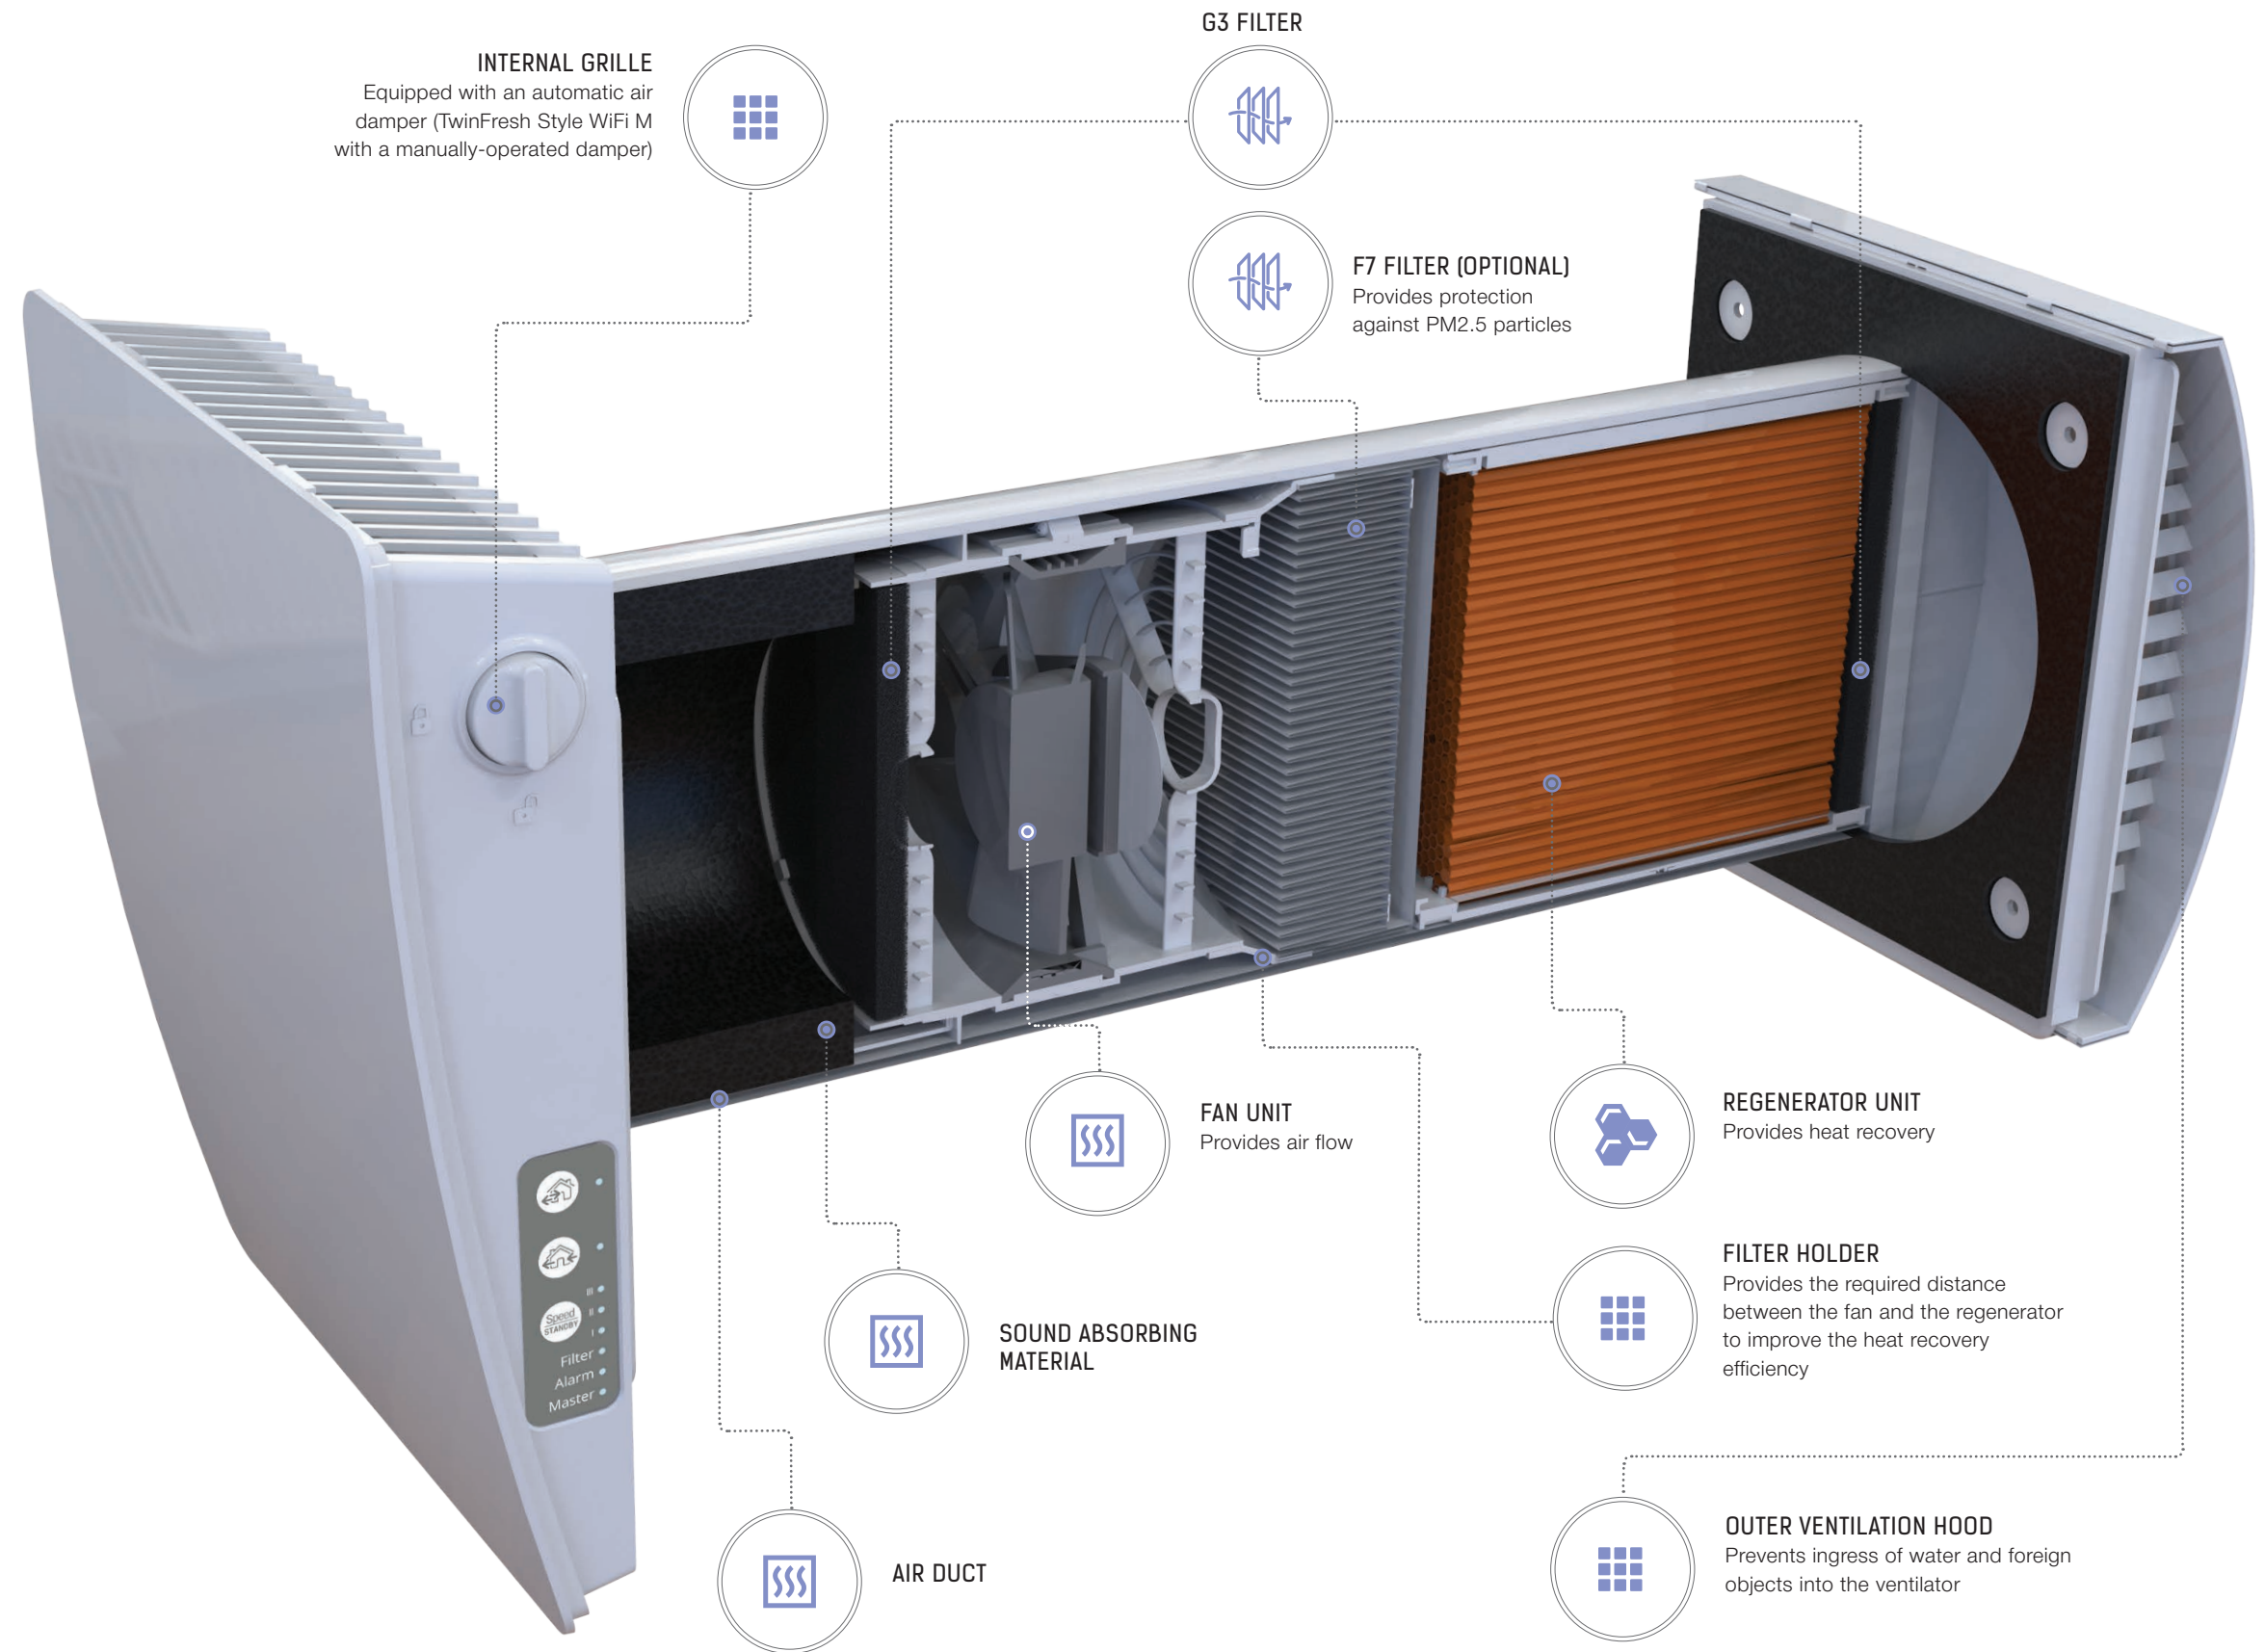


TECHNICAL DATA

| Speed | I | II | III |
|---|------------------------|---------|---------|
| Voltage [V/Hz] | 100-240 / 50-60 | | |
| Power [W] | 2.0 | 3.5 | 5.5 |
| Current [A] | 0.03 | 0.03 | 0.06 |
| Air flow in ventilation mode [m³/h (l/s)] | 15 (4) | 35 (10) | 50 (14) |
| Air flow in energy recovery mode [m³/h (l/s)] | 8 (2) | 18 (5) | 25 (7) |
| SFP [W/l/s] | 0.96 | 0.84 | 0.79 |
| Transported air temperature [°C] | -20 (-30*)...+40 | | |
| Sound pressure level at 1 m distance [dBA] | 10 | 28 | 35 |
| Sound pressure level at 3 m distance [dBA] | 1 | 19 | 26 |
| Outdoor sound pressure attenuation in accordance with DIN EN 20140 [dBA] | 40 | | |
| Heat recovery efficiency in accordance with DIBt LÜ-A 20 [%] | ≤ 90 | | |
| Classification of the indoor/outdoor air tightness, according to EN 13141-8 | D1 | | |
| Filter | G3 (G4, F7 optional**) | | |
| Degree of filtration from particles PM2.5 with F7 filter [%] | 99 | | |
| **Air flow with F7 filter applied [m³/h] | 40 | | |


*When using the EH-13 hood (TwinFresh Style Frost).





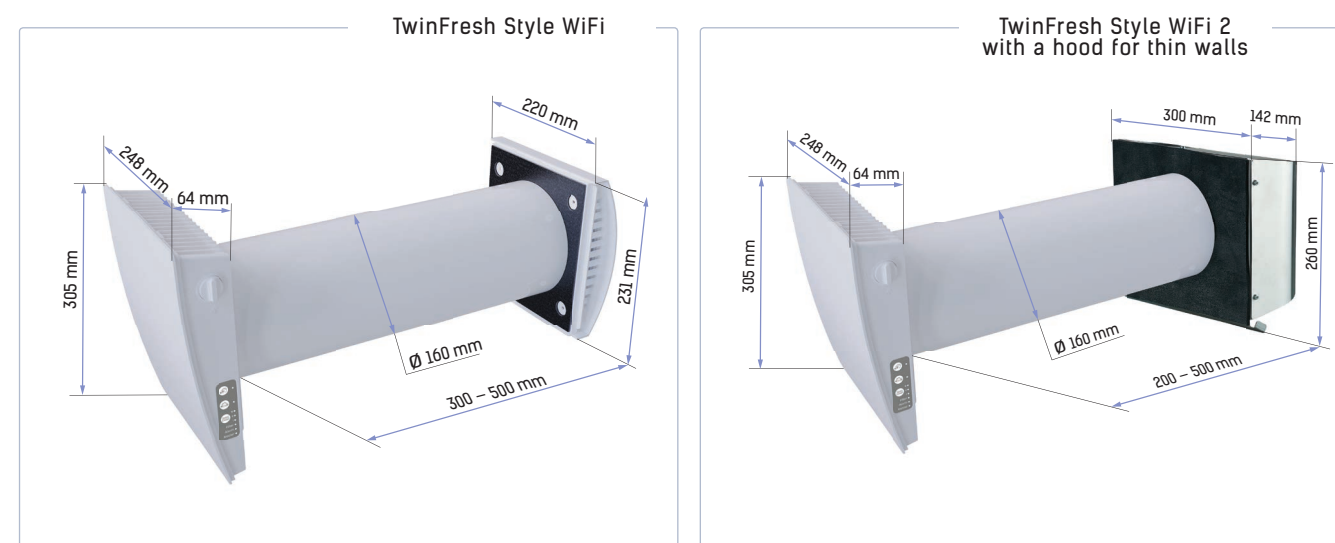








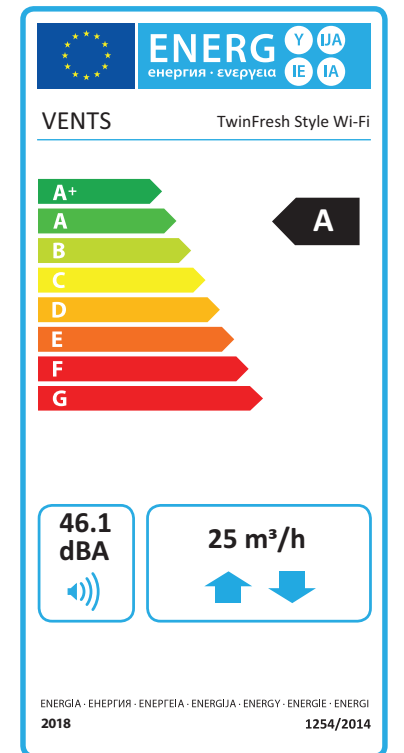

OVERALL DIMENSIONS






ECODESIGN




| Specific energy consumption (SEC) [kWh(m².a)] | Cold | | Average | | Warm | |
|---|---|---------|---------|---|-------|---|
| | -84.3 | A+ | -41.3 | A | -16.7 | E |
| Type of ventilation unit | Bidirectional | | | | | |
| Type of drive installed | Stepless fan speed control | | | | | |
| Type of heat recovery system | Regenerative | | | | | |
| Thermal efficiency of heat recovery [%] | 82.1 | | | | | |
| Maximum air flow [m³/h] | 25 | | | | | |
| Power [W] | 5.5 | | | | | |
| Sound power level [dBA] | 46.1 | | | | | |
| Reference flow rate [m³/s] | 0.005 | | | | | |
| Reference pressure difference [Pa] | 0 | | | | | |
| Specific power input (SPI) [W/(m³/h)] | 0.2 | | | | | |
| Control typology | Local demand control | | | | | |
| Maximum internal leakage rates [%] | 2.7 | | | | | |
| Maximum external leakage rates [%] | 0 | | | | | |
| Mixing rate of bidirectional units [%] | 1 | | | | | |
| Classification of the airflow sensitivity to pressure variations, according to EN 13141-8 [%] | 37.3 | | | | | |
| Classification of the indoor/outdoor air tightness, according to EN 13141-8 [m³/h] | 0.5 | | | | | |
| Internet address | http://www.ventilation-system.com | | | | | |
| Annual electricity consumption (AEC) [kWh electricity/a] | Cold | Average | Warm | | | |
| | 144 | 144 | 144 | | | |
| Annual heating saved (AHS) [kWh primary energy/a] | Cold | Average | Warm | | | |
| | 8789 | 4493 | 2032 | | | |



| | | | | |
|------------------|------------------|---|--|---|
| Hoods | EH-14 white 160 |  | Plastic hood. Colour options: |       White Black Grey Terracotta Brown Beige |
| | EH-14 chrome 160 |  | Grey plastic outer hood with a brushed stainless steel cover | |
| | EH-2 grey 160 |  | Grey painted stainless steel outer hood for thin walls | |
| | EH-2 chrome 160 |  | Polished stainless steel hood for thin walls | |
| | EH-13 white 160 |  | White painted aluminium outer hood for cold climate | |
| | EH-13 chrome 160 |  | Stainless steel ventilation hood for cold climate | |
| | MVVM 162 05 |  | Hood for mounting from inside | |
| Angular mounting | 160 white |  | Kit for angular mounting with a white grille | |
| | 160 chrome |  | Kit for angular mounting with a stainless steel outer grille | |

| | | | |
|-------------------|-------------------|---|--|
| Mounting elements | Duct 160 -500 |  | Round air duct with a diameter of 160 mm and a length of 500 mm with a foam plug |
| | Duct 160 -700 |  | Round air duct with a diameter of 160 mm and a length of 700 mm with a foam plug |
| | T TwinFresh Style |  | Cardboard template for indoor installation of the unit |

| | | | |
|------------------------|----------------------------------|---|---|
| For ventilator control | RK1 TwinFresh |  | Remote control |
| | KV TwinFresh Style |  | Wi-Fi sensor control panel |
| | CO2-1 |  | CO ₂ sensor with LED indication and sensor buttons |
| | CO2-2 |  | CO ₂ sensor |
| | TRF-220/24-1.6 or TRF-120/24-1.6 |  | Power supply for CO ₂ sensors |

| | | | |
|---------|------------------|---|---|
| Filters | SF2 TwinFresh G3 |  | G3 filter kit (2 pcs.) |
| | SF2 TwinFresh G4 |  | Contents: • plastic filter holder (1 pc.) • filter G4 (1 pc.) |
| | SF2 TwinFresh F7 |  | Contents: • plastic filter holder (1 pc.) • F7 filter (1 pc.) The F7 filter reduces air flow to 40 m ³ /h |